

UV-C Germicidal Low Pressure Lamp

UVCH11H12×236-G23

Electrical Data:

Lamp power	11 W
Lamp voltage	106 V
Lamp current	130 mA

Performance Data:

Average lifetime	> 8000 hrs
UV-C irradiance (@ 5min)	> 38 $\mu\text{W}/\text{cm}^2$ (@ 1 m)
Generation of ozone	no

Test Condition:

Environment temperature	26 \pm 2 $^{\circ}\text{C}$
Relative humidity	50%-90%


Environmental Condition:

Working temperature	0 $^{\circ}\text{C}$ -50 $^{\circ}\text{C}$
Working humidity	20%-90%

Attention:

The radiation of the lamps does harm to humans and animals, especially the eyes. So appropriate precaution and protection is necessary to avoid direct radiation.

Performance of the lamps are related to the power input and the matched ballast used.

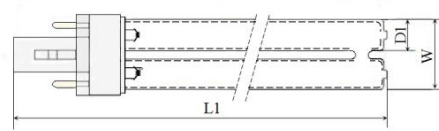

Geometric Data:

Overall length	L1	236 \pm 1.5 mm
Tube diameter	D1	12 \pm 0.2 mm
Tube width	W	Max28 mm
Base		G23

Applications:

Air disinfection
Water disinfection
Surface disinfection

Spectral Radiation Distribution:

