

UV-C Germicidal Low Pressure Lamp

UVCH6D15×212-G5(Ceramic lamp holder)

Electrical Data:

Lamp power	6 W
Lamp voltage	50 V
Lamp current	140 mA

Performance Data:

Average lifetime	> 5000 hrs
UV-C irradiance (@ 5min) (@ 1 m)	> 160 mW/cm ²
Generation of ozone	no

Test Condition:

Environment temperature	26±2°C
Relative humidity	50%-90%


Environmental Condition:

Working temperature	0°C-50°C
Working humidity	20%-90%

Attention:

The radiation of the lamps does harm to humans and animals, especially the eyes. So appropriate precaution and protection is necessary to avoid direct radiation.

Performance of the lamps are related to the power input and the matched ballast used.

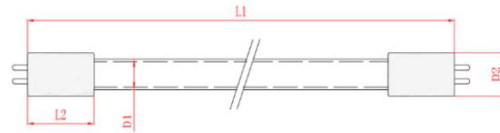

Geometric Data:

Overall length	L1	212±1.5 mm
Base length	L2	30±0.5 mm
Tube diameter	D1	15±0.25 mm
Base diameter	D2	19±0.5 mm
Base	G5 (Ceramic lamp holder)	

Applications:

Air disinfection
Water disinfection
Surface disinfection

Spectral Radiation Distribution:

